



<b>Engine</b>	Cummins B3.9-100C
<b>Rated Power</b>	73.5 kW (99 hp / 100 ps) @ 2,200 rpm
<b>Max. Working Radius</b>	8,690 mm
<b>Drawbar Pull</b>	153 kN
<b>Operating Weight</b>	17,300 kg
<b>Max. Grapple Opening</b>	1,843 mm
<b>Gradeability</b>	35°

# 915E FM FORESTRY EXCAVATOR

TOUGH WORLD. TOUGH EQUIPMENT.

# 915E<sup>FM</sup> SPECIFICATIONS >>>

## ENGINE

Manufacturer	Cummins
Model	B3.9-100C
Rated Power	73.5 kW (99 hp / 100 ps) @ 2,200 rpm
Peak Torque	385 N·m @ 1,500 rpm
Number of Cylinders	4
Displacement	3.9 L

## HYDRAULIC SYSTEM

Main Pumps Total Flow	2*132 L/min
Relief Pressure, main	34.3 MPa
Relief Pressure, boost	37 MPa

## SERVICE CAPACITIES

Fuel Tank	245 L
Engine Oil	14 L
Cooling System	21 L
Hydraulic Reservoir	160 L
Hydraulic System Total	240 L

## BOOM & ARM

Boom Length	4,600 mm
Arm Length	2,900 mm

## UNDERCARRIAGE

Shoe Width	960 mm
Number of Shoes per Side	42
Number of Upper Rollers per Side	2
Number of Bottom Rollers per Side	6

## TRACK DRIVE


Maximum Travel Speed	4.7 km/h
Drawbar Pull	153 kN

## SWING SYSTEM

Swing Speed	11.94 rpm
-------------	-----------

## WORKING RANGE

A Max. Working Height	9,300 mm
B Max. Working Depth	5,530 mm
C Max. Working Radius	8,690 mm
D Min. Front Swing Radius	2,550 mm

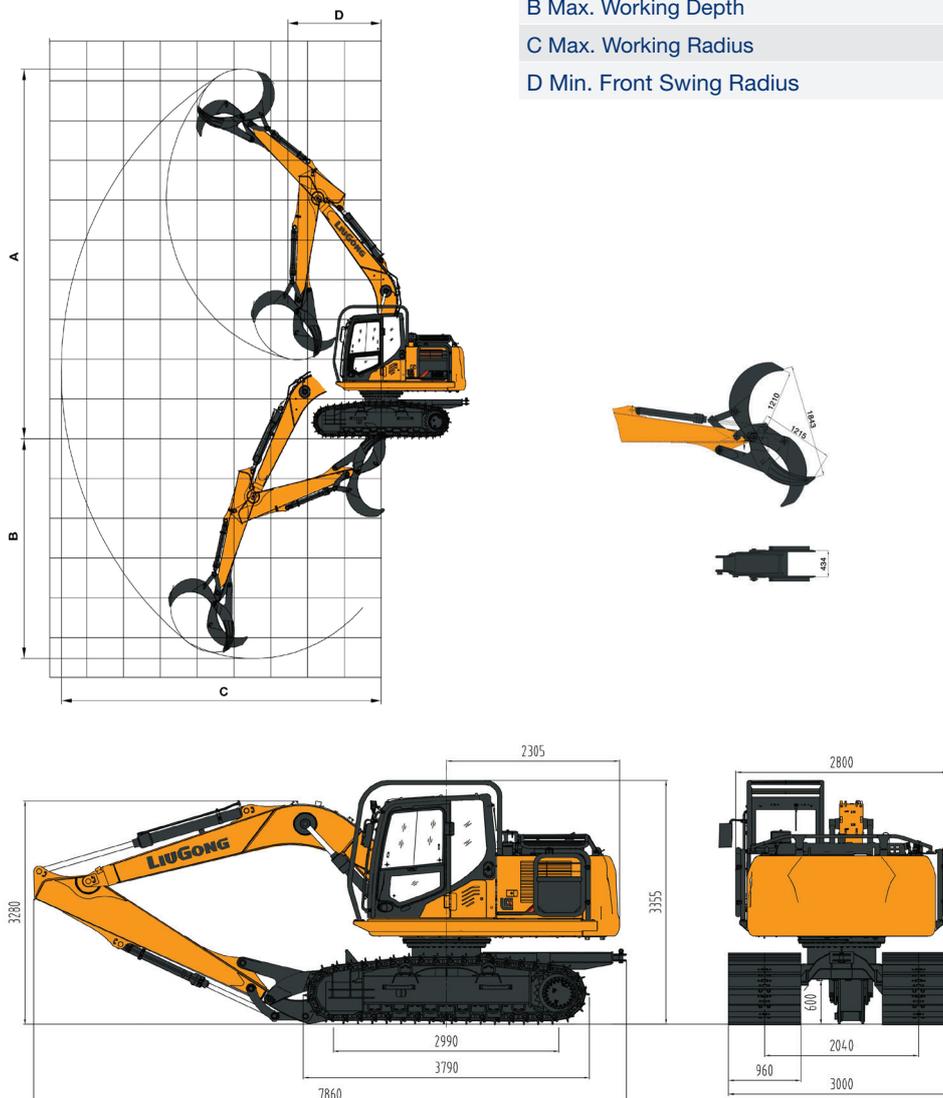

Unit: mm

### PT BUMI CITRA TRAKTOR NUSANTARA

WTC Mangga Dua, Lantai 3A,  
Jl. Mangga Dua Raya No. 8, Kel. Ancol, Kec. Pademangan,  
Jakarta Utara, 14430. Telp. (021) 3001 2318 ext. 201

### Branch Office

- Jakarta
- Pekanbaru
- Jambi
- Medan
- Surabaya
- Banjarmasin



Specifications and design are subject to change notice. Machines shown may include optional equipment. Liugong standard and optional equipment may vary from region to region. Please consult your Liugong dealer for information specific to your area. Engine power kW is converted to horsepower (1 kW=1.3596 ps and 1 kW=1.3410 hp) in this file.